EU-TYPE EXAMINATION CERTIFICATE

CTC

The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

Certificate N° 0075/797/162/05/18/0947

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

Manufacturer :

HONEYWELL SAFETY PRODUCTS EUROPE

Immeuble Edison ZI-Paris Nord II 33, Rue des Vanesses 95 958 ROISSY CDG CEDEX

France

7,8,9,10,11

Description

PPE Type : Product reference : Glove description :

protective glove against mechanical risks, thermal risks 2094140

5 fingers knitted glove. Grey Cotton/polyamide yarns. Blue latex coating on the palm and fingertips + overlock T07/Red, T08/Blue, T09/Yellow, T10/White, T11/Orange

Available sizes :

Pictures :





Address: HONEYWELL SAFETY PRODUCTS EUROPE Immeuble Edison ZI-Paris Nord II 33 Rue des Vanesses 95 958 ROISSY CDG CEDEX France Address has to be printed on back side of the gloves or on a label inside the

Reference standard :

Levels of performance / class of protection

gloves.

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material. « 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

EN ISO 21420:2020	-
EN 388:2016 + A1:2018	2142X
EN 407:2004	X 2 X X X X

At the date of certificate the product is in compliance with Annex XVII of REACh regulation (n° 1907/2006 and revisions)


NB 007

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file and the Instruction for Use index 03 dated from December, 2020

NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425. Any marking on the PPE which is not concerned by the Regulation (UE) 2016/425, is not covered by this certificate.

Issued in Lyon by Didier GUISADO Certification and Quality Manager

In application of the Regulation 2016/425 of the European **Patients** and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC.



www.ctcgroupe.com

cemarking@ctcgroupe.com

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France Tél. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - ctclyon@ctcgroupe.com

cofrac

MARKIN

TIFIED BOD

n° 0075

V CT

Accreditation n# 5-0594 Scope available on:

richard

Comité Professionnel de Développement Économique (CPDE) Cuir Chaussure Maroquinerie Ganterie Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

HONEYWELL SAFETY PRODUCTS EUROPE

MANUFACTURER'S TECHNICAL FILE TO THE PPE REGULATION 2016/425

Reference of the product	:	2094140
Article code	:	
Technical file index	:	03
Last update	:	December, 2020

IDENTIFICATION

Reference of the product : Article code : Basic Model	:	2094140
Technical file index :	:	03
Last update :	:	December, 2020

Manufacturer :

HONEYWELL SAFETY PRODUCTS EUROPE

Immeuble Edison ZI-Paris Nord II 33, Rue des Vanesses 95 958 ROISSY CDG CEDEX

France

tel: 01.49.90.79.79 fax: 01.49.90.79.80

Factory :

NANTONG HENGHUI GLOVE Co. LTD.

Tonghu Road, Rudong New Development - Nantong City - Jiangsu Province

CHINA

tel: + 86-513-8456999 fax: +86-513-84536318

SPERIAN PERSONAL PROTECTIVE EQUIPMENT (Nantong) Co. LTD Tonghu Road, Rudong Industrial New area - Nantong City - Jiangsu Province CHINA tel: + 86-513-8456999

fax: +86-513-84536318

HONEYWELL SAFETY PRODUCTS (NANTONG) CO., LTD.

North of Yalujiang Road, Rudong Economic Development Zone, Rudong, Nantong China

tel: fax:

GLOVE DESCRIPTION

General glove description :

5 fingers knitted glove. Grey Cotton/polyamide yarns. Blue latex coating on the palm and fingertips + overlock T07/Red, T08/Blue, T09/Yellow, T10/White, T11/Orange

This glove is designed against mechanical risks, thermal risks.

Type of coating finish: smooth

Visual description (picture back and palm sides) :



	Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)				
		Applicable	Covered by		
§1	Requirements defined in the Annex II §1 are applicable to all PPE	7	✓ Standard ✓ Instruction for use ✓ Marking		
§1.4	§1.4 Manufacturer's instructions and information is available		Standard Instruction for use Marking		
§2.5	PPE which may be caught up during use	7	Standard Instruction for use Marking		
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	7	 Standard Instruction for use Marking 		
§2.14	Multi-risk PPE	7	 Standard Instruction for use Marking 		
§3.3	The PPE is intended to protect against mechanical injuries	7	✓ Standard ✓ Instruction for use ✓ Marking		
§3.6	Protection against heat and/or fire	7	Standard Instruction for use Marking		

Glove constitution :

	Reference	Color	Material	Surfacic mass (g/m²)	Gauges	Thickness
Palm	2915129	Grey	Cotton/polyamid yarns		10	
Faim	2916144	Blue	Latex			1,5-1,8mm
Back	2915129	Grey	Cotton/polyamid yarns		10	
Cuff	2915129	Grey	Cotton/polyamid yarns		10	
Cull	2015161	Natural	elastic rubber		10	
Binding	2915151	Red / Blue / Yellow / White / Orange	PES			

PROTECTION SCOPE

This glove meets the essential requirements of the Personal Protective Equipment Regulation 2016/425. This glove is designed against mechanical risks, thermal risks. It is a category II product.

GENERAL REQUIREMENTS

Standard EN ISO 21420:2020

Dexterity : 5

Available size range: 7,8,9,10,11

The hand sizing system is based on hand circumference and hand length as defined in EN ISO 21420 Annex B table B.1

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

Mechanical hazard EN 388 : 2016 + A1 : 2018

Protection offered	Performance levels
Abrasion resistance	2
Blade cut resistance	1
Tear strength resistance	4
Puncture resistance	2
Cut Resistance method (EN ISO 13997)	Х
Impact Protection	-

The levels of performance have been measured on the palm

Thermal hazard EN 407:2004

Protection offered	Performance levels
Burning behaviour	Х
Contact heat	2
Convective heat	Х
Radiant heat	Х
Small splashes of molten metal	Х
Large quantities of molten metal	Х

TEST REPORTS


Laboratory	CTC	Other
	L171121315_1, L170509049 _1, L200914807_1, L200913822 _1	
EN 388	L170509048_1, L171121314_1	
EN 407	L171121314_1	

MARKING - PACKAGING

Information printed on the glove :

Logo of Manufacturer : Logo ((Glove's reference : 2094140 Article Code : Size indicator Pictograms related to risks against which protection is offered with performance levels Information pictogram Address of Manufacturer : Date of Manufacture (month/year) and/or serial/batch number : Date of obsolescence (month/year) if applicable:

Marking example :

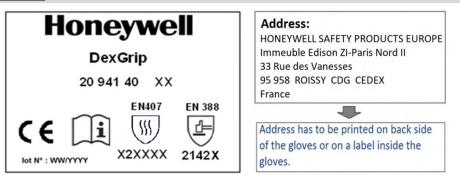

Marking of packaging example :

Honeywell
REFERENCE: 2094140
DESCRIPTION: DEXGRIP
SIZE: Image: Constraint of the state
LOT NUMBER: :WW / YYYY MADE IN China

Method of marking on the glove :

Tampography on the back

Packaging :

10 pairs per bundle, 10 bundles per box

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean, ventilated, light).

Cleaning:

The gloves are not washable.

MEANS OF CONTROL

Final inspection plan : in accordance to ISO 2859 level 1 Major defects : NQA = 1,5 / Minor defects : NQA = 10.

Sampling Plan		Quantity of acceptable defects	
Lot Quantity Sample quantity		Minor Defects	Major Defects
110 to 200	D8	2	0
201 to 500	F 20	5	1
501 to 1200	G 30	7	1
1201 to 10000	J 80	14	3
10000	K 125	21	5