


Class 0/RC according to EN60903:2003+AC:2005  
 Max working Voltage (A.C) = 1000 V  
 Length = 360 mm



## TECHNICAL PROPERTIES

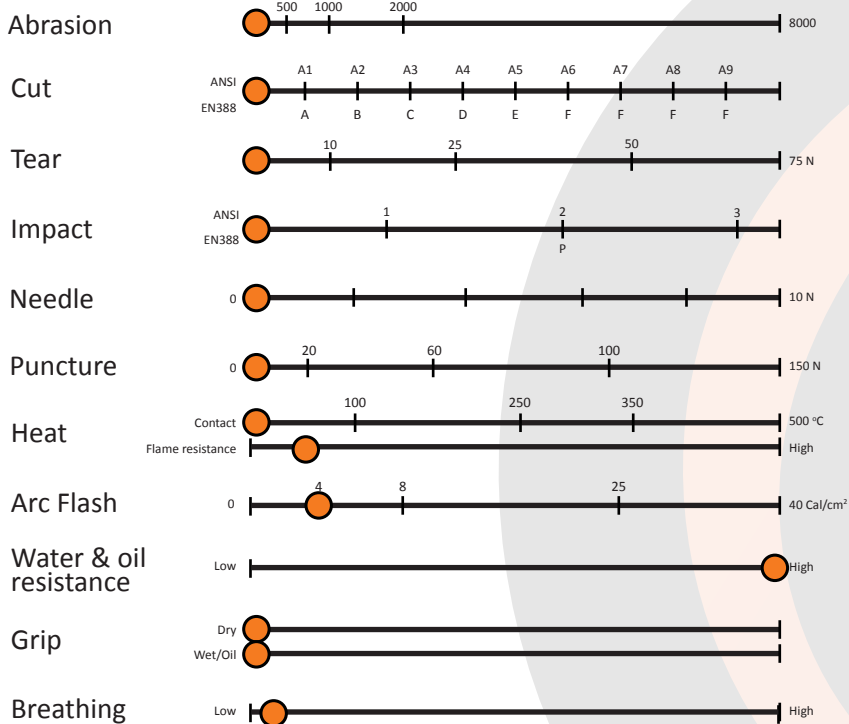

EN 60903:2003+AC2:2005



Arc Flash parameters



Class 0 = 4kA, t=0,5, x=0,3 m  
 According to 1. EN61482-1-1:2009  
 2. EN61482-1-2:2010

CE 1437  
 CAT III


ART.NO: DE-0-LA  
 1 pair / pack

9	10	11
M	L	XL

Class 0/RC according to EN60903:2003+AC:2005  
 Max working Voltage (A.C) = 1000 V  
 Length = 360 mm



## TEKNISKA EGENSKAPER

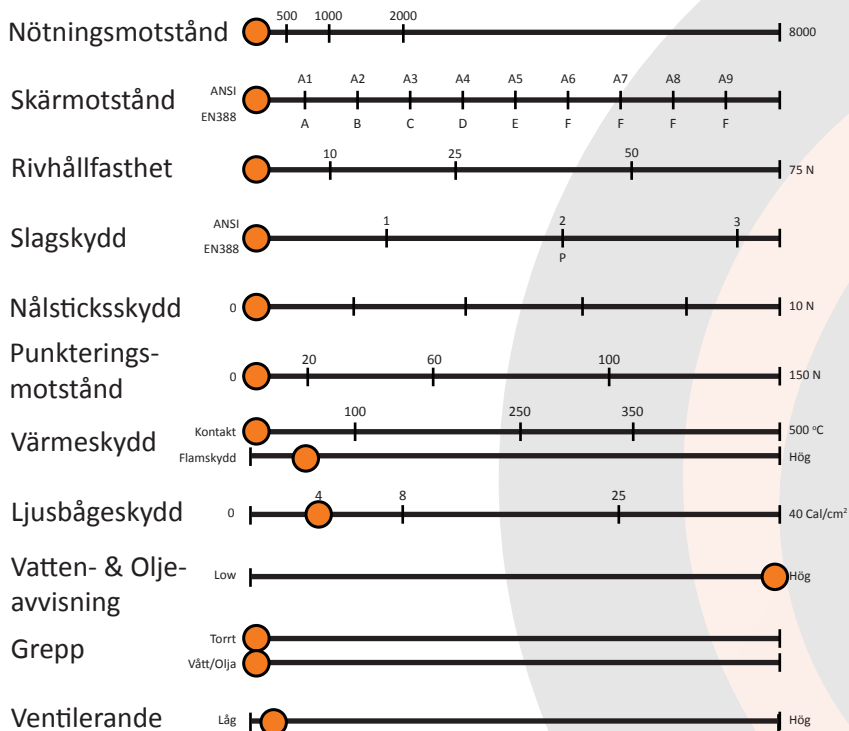

EN 60903:2003+AC2:2005



Arc Flash parameters



Class 0 = 4kA, t=0,5, x=0,3 m  
 According to 1. EN61482-1-1:2009  
 2. EN61482-1-2:2010

CE 1437  
 CAT III

Art.nr: DE-0-LA  
 1 par / pack

9	10	11
M	L	XL


Class 0/RC according to EN60903:2003+AC:2005

Max working Voltage (A.C) = 1000 V

Length = 360 mm



## TECHNISCHE EIGENSCHAFTEN

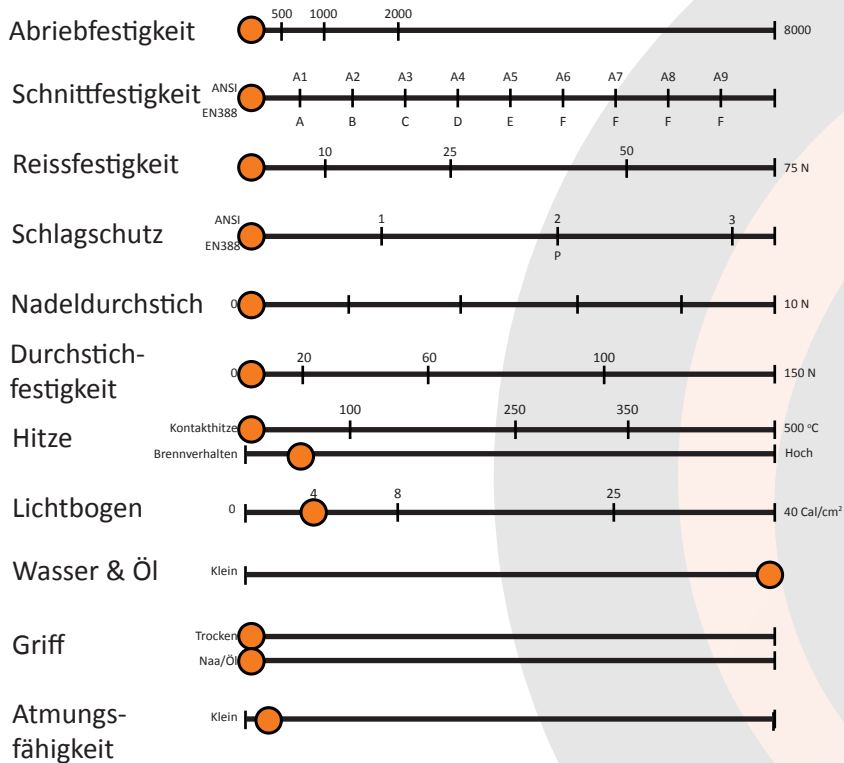

EN 60903:2003+AC2:2005



Arc Flash parameters



Class 0 = 4kA, t=0,5, x=0,3 m

According to 1. EN61482-1-1:2009

2. EN61482-1-2:2010

CE 1437  
CAT III

Art.nr: DE-0-LA  
1 paar

9	10	11
M	L	XL


Class 0/RC according to EN60903:2003+AC:2005

Max working Voltage (A.C) = 1000 V

Length = 360 mm



## PROPRIETÀ TECNICHE

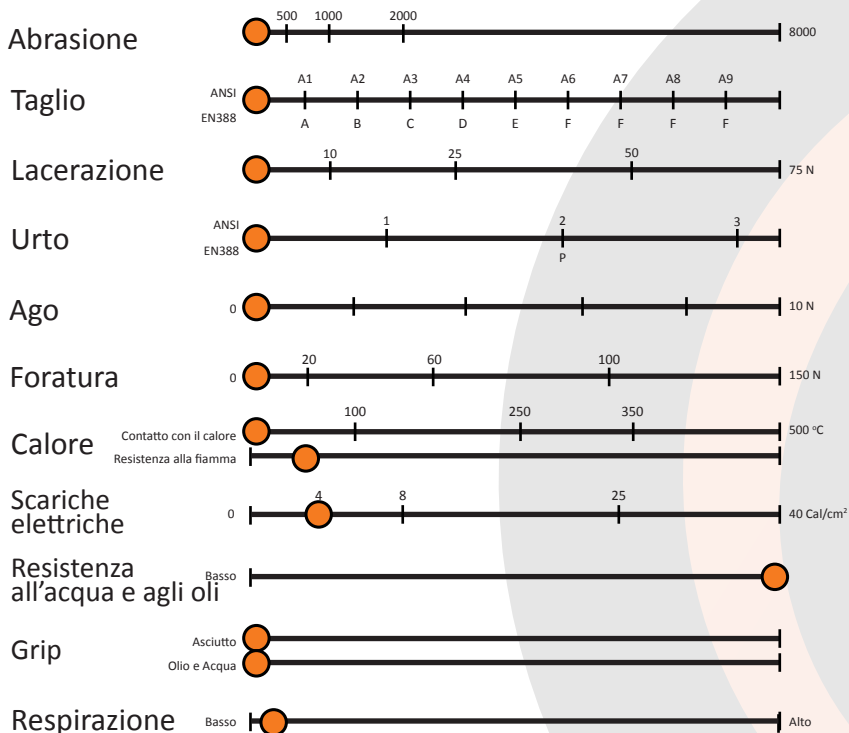

EN 60903:2003+AC2:2005



Arc Flash parameters



Class 0 = 4kA, t=0,5, x=0,3 m

According to 1. EN61482-1-1:2009

2. EN61482-1-2:2010

CE 1437  
CAT III


ART.NO: DE-0-LA  
1 paia

9	10	11
M	L	XL

Class 0/RC according to EN60903:2003+AC:2005  
 Max working Voltage (A.C) = 1000 V  
 Length = 360 mm



## PROPIEDADES TÉCNICAS

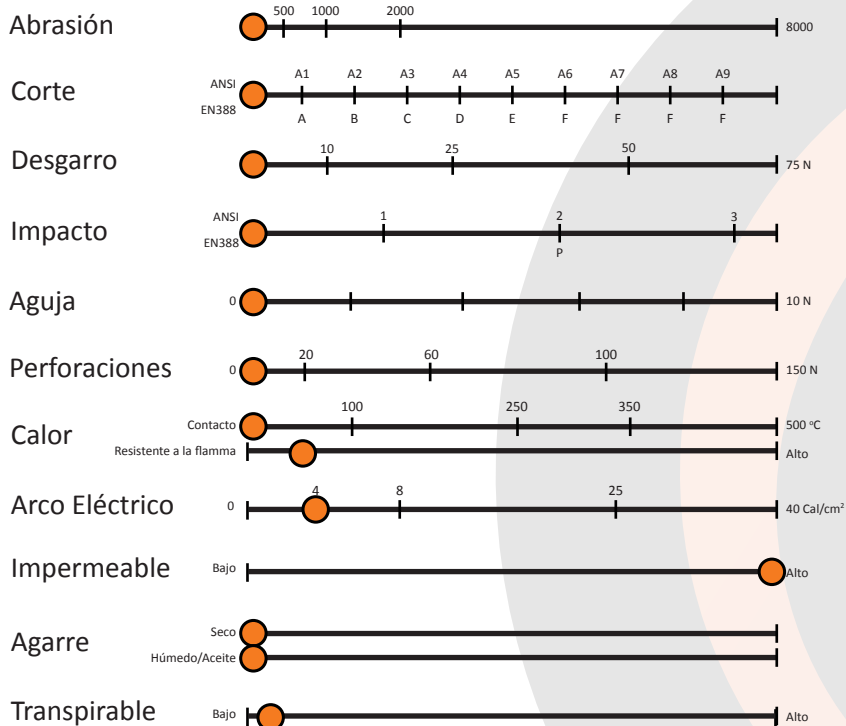

EN 60903:2003+AC2:2005



Arc Flash parameters



Class 0 = 4kA, t=0,5, x=0,3 m  
 According to 1. EN61482-1-1:2009  
 2. EN61482-1-2:2010

CE 1437  
 CAT III

ART.NO: DE-0-LA  
 1 pares

9	10	11
M	L	XL


Class 0/RC according to EN60903:2003+AC:2005

Max working Voltage (A.C) = 1000 V

Length = 360 mm



## WŁAŚCIWOŚCI TECHNICZNE

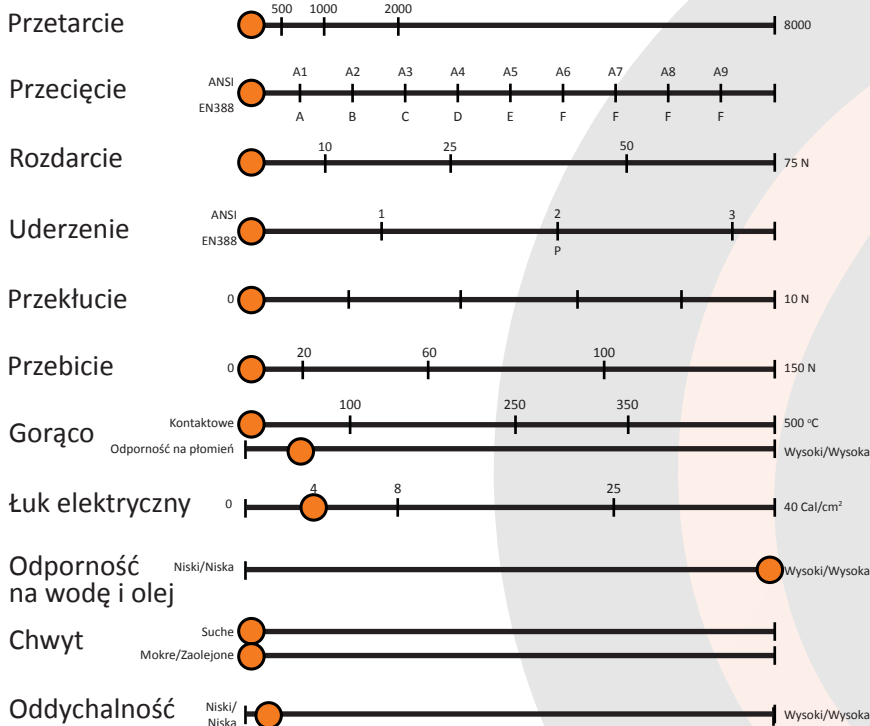

EN 60903:2003+AC2:2005



Arc Flash parameters



Class 0 = 4kA, t=0,5, x=0,3 m

According to 1. EN61482-1-1:2009  
2. EN61482-1-2:2010

CE 1437  
CAT III

ART.NR: DE-0-LA  
1 par

9	10	11
M	L	XL